

# NovaSeal<sup>®</sup>

by Tuck

**NEW  
PRODUCT**



## NOVASEAL<sup>®</sup> ULTRA

### SYNTHETIC ROOF UNDERLAYMENT

NovaSeal<sup>®</sup> ULTRA is made from a completely waterproof construction of woven polypropylene and a slip resistant nonwoven top surface. ULTRA forms a barrier in your roofing system that helps protect residential or commercial steep slope roofs in the most extreme weather conditions. ULTRA synthetic roof underlayment delivers exceptional long-term weather barrier performance compared to traditional asphalt felt products. ULTRA is designed for use under metal, asphalt shingles, synthetic shingles, primed cedar shakes and tiles.



### FEATURES & BENEFITS

#### SUPERIOR CONSTRUCTION

- Durable, woven construction holds up to rugged tile, metal and slate installs
- Strong and pliable material that performs in the most extreme temperatures
- Will not crack or dry out under metal or tile
- Withstands UV exposure for up to 180 days

#### INSTALLER FRIENDLY


- Nonwoven walking surface provides excellent slip resistant properties
- Horizontal marker for overlap
- Lighter weight and easier to handle (10-square roll is only 35 lbs)

#### COVERS MORE

- Greater roof coverage per roll than traditional roofing felt

#### PROTECTION

- Extended UV protection – can be left exposed for up to 180 days
- Exceptional tear and puncture resistance

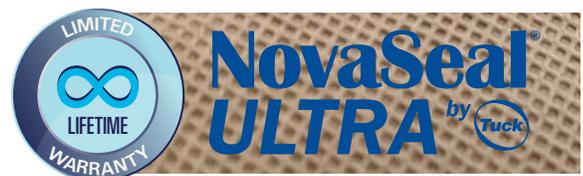

NovaSeal<sup>®</sup> ULTRA meets or exceeds all required building codes:

- ASTM D226 Types I & II, ASTM D4869
- CAN/CSA A123.3, CAN/CSA A220.1
- Florida Building Code FL26367
- Class A Fire ASTM E108
- CCRR 1105, AC188
- Texas Department of Insurance
- Miami-Dade NOA 20-1015.01



800-565-2000 | [cantech.com](http://cantech.com)

**ipg**<sup>®</sup> **intertape  
polymer  
group**<sup>®</sup>

## PROPERTIES / TEST METHOD

Tensile Strength ASTM D5034	MD 150 lbs (68 kg) / CD 150 lbs (68 kg)
Tear Strength ASTM D4533	MD 50 lbs (23 kg) / CD 40 lbs (18 kg)
Liquid Water Transmission ASTM D4869	Pass
UV Exposure	180 Days
Permeability ASTM E96	< 0.05 Perms
Temperature Range	-40°F to 240°F / -40°C to 115°C
Limited Warranty	LIFETIME

## ROLL / PALLET SPECS

Length per Roll	250' / 76.2 m
Width per Roll	48" / 1.1 m
Weight per Roll	35 lbs / 15.9 kg
Roll Size	10 sq / 93 m <sup>2</sup>
Rolls per Pallet / Truck	36 / 1296



Scan for more info or visit [cantech.com/novaseal](http://cantech.com/novaseal)

